



## APPLICATIONS

Live Sound Reinforcement  
Theaters  
Houses of Worship  
Dance Clubs  
Cruise Ships  
Entertainment Venues  
Cinema

## FEATURES

kiT Rigging Corners  
High Output  
LF Device: 12in. (304.8mm)  
HF Device:  
Exit: 2in. (50.8mm)  
Voice Coil Diam: 3 in. (76.2mm)  
Vertical Pole Mount Package  
Rotatable 90° H x 40° V HF  
Durable Polyurea Coating  
Active/Passive Mode Switchable  
(2) EP-4 Connectors &  
(1) 4-Position Terminal Strip

## GENERAL DESCRIPTION

kiT12 is a full range, high output loudspeaker ideal for speech and music reproduction. The kiT12 is one of Clair Brothers most versatile full range speakers.

Exceptional intelligibility, high output performance and durability make the kiT12 an excellent choice for virtually any indoor or outdoor application.

The kiT12 has been engineered for optimal individual performance or as part of a multiple cabinet system with added flexibility to mount vertically or horizontally, or on pole mount with subwoofer base.

The cabinet features a custom 12" transducer and one 2" exit/3" voice coil diameter+ high frequency driver coupled to a 90° H x 40° V (or 60° H x 40° V) rotatable constant directivity horn that delivers naturally smooth uniform coverage in both near-field and medium throw applications.

The standard model includes a rear input connector and control panel that features one male EP-4 and one female EP-4 connector as well as a 4-position terminal strip. The cabinet may be operated in either two-way active or passive modes, selected by an external pair of jumpers.

A simplified installation version features only terminal strip input; similarly a weather resistant (WR) version is available with a water-tight cable pre-installed.

For a cabinet of its size the kiT12 offers extremely efficient low-end response to 63Hz.

As with all Clair Brothers products, the kiT12 is constructed of the finest Baltic birch and finished with a rugged polyurea coating to withstand the most demanding conditions.

The speaker grille is constructed of high grade 14 gauge perforated steel with a powder coated finish.

## OPTIONS & ACCESSORIES

### Rigging Accessories

kiT12-i – Installation Model w/Terminal Strip  
kiT12-PLUS – Self Powered Model with Amp + DSP  
kiT12-WR – Weather Resistant Model  
60° H x 40° V Rotatable Horn  
RC-kiT12 – Clamshell ATA-style road case (2x) kiT12  
kiT-Caddy – Road case for (2x) kiT, + Poles,  
+ Rigging Accessory Storage Compartment



## AUDIO SPECIFICATIONS




Loudspeaker Type	Mobile	Two-Way Active / Passive
Frequency Response (+/- 2dB)		63Hz-20kHz
Recommended Power Amplifier		1000-1200W @ 8 Ohms
Sensitivity (1 Watt @ 1 Meter)	LF HF	98.5 dB SPL 100 dB SPL
Maximum Output	Cont. Peak	126 dB SPL 129 dB SPL
Drivers	LF HF	(1) 12 in. (304.8mm) (1) Exit 2 in. (50.8mm); VC diameter 3.0 (76.2mm)
Nominal Impedance	LF HF	8 Ohms 16 Ohms
Power Handling	LF HF	500W Cont. 150W Cont.
Dispersion	Nominal -6dB Optional	90° H x 40° V (Rotatable) 60° H x 40° V (Rotatable)
Input Connections	Standard	(2) EP-4 Connectors (1 Male, 1 Female) & (1) Four-Position Terminal Strip
	Install Option	(1) Four-Position Terminal Strip

- Passive to Active Mode Instructions
1. Remove terminal strip cover on rear of kit12 speaker cabinet
  2. Loosen all 4x terminal screws
  3. Remove 2x jumpers (connecting Low- to Hi- AND Low+ to Hi+)
  4. Save jumpers for future use
  5. Replace wire cover

## MECHANICAL SPECIFICATIONS

Enclosure	Shell Finish	18mm, 13-Ply Baltic Birch Durable Polyurea Coating
Rigging		kit Rigging Slot on (4) Corners
Grille		Perforated Steel, Foam Backed
Dimensions	Height Front Width Rear Width Depth	28.12 in. (714.6mm) 14.80 in. (376mm) 7.75 in. (197mm) 15.20 in. (385mm)
Weight		63 lbs. (28.6kg)
Shipping Weight		83 lbs. (37.6kg)

Note: All wattage figures are calculated using the rated nominal impedance.  
Clair Brothers products are designed to perform optimally by utilizing factory recommended proprietary DSP settings.

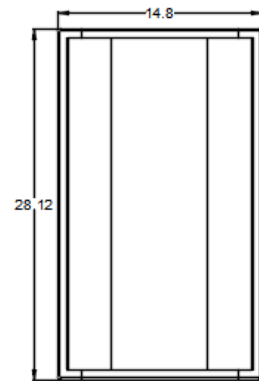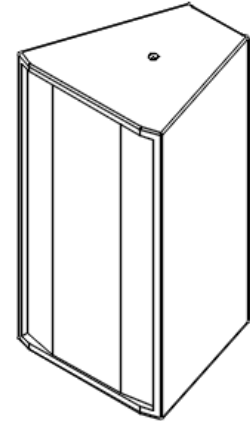

### kit12 Active Pin Configuration

EP-4 PIN	USE
1	Low (-)
2	Low (+)
3	High (-)
4	High (+)
Terminal Strip	USE
Black	Low (-)
Red	Low (+)
Black	High (-)
White	High (+)

### kit12 Passive Pin Configuration

EP-4 PIN	USE
1 & 3	(-)
2 & 4	(+)
Terminal Strip	USE
Black	Low (-)
Black	High (-)
White	High (+)
Red	Low (+)

## ARCHITECT AND ENGINEER SPECIFICATIONS

The loudspeaker shall be a two-way active/passive (externally switchable) system featuring a total of two drivers. The low frequency section shall contain one 12" driver capable of handling 500 watts of pink noise with a 6 dB crest factor for 8 hours (as per EIA RS-426-A standard). The high frequency section shall contain a single 2" exit compression driver with a 3" diaphragm and shall be attached to a 90° H x 40° V (Optionally 60° V x 40° H) constant-directivity horn. The driver shall be capable of handling 150 watts (1 kHz -10 kHz) of pink noise with a 6 dB crest factor for 2 hours (as per AES-1984 and ANSI S4.26-1984 standards). The enclosure shall be constructed of 18mm, 13-ply Baltic birch and shall be finished with a durable polyurea coating. Dimensions shall be 28.12" high, 14.80" front width tapering 14° to 7.75" rear width, and 15.20" deep. The total cabinet weight shall be 63 lbs (28.6kg). The loudspeaker shall be the Clair Brothers kit12.



## MODES OF USE

